

**McFLO**

# Product Catalogue



**McFlo Technologies Sdn Bhd**  
(486350-K)



# McFLO

McFlo Technologies Sdn Bhd (486350-K)

## Introduction

McFLO offers a wide range of pumping solution to the varies market e.g. Water & Wastewater of Municipal, Flood Control, Dewatering, Irrigation, Oil & Gas, Petrochemical, Food Industries, Pharmaceutical, Steel Mill, Marine, Naval, Mining, Power generation, HVAC, Fire Fighting et cetera.

McFLO collaborate with the India largest pump manufacturer WPIL (formerly known as Worthington India). WPIL is the one of the pump company in the world has the depth or breadth of expertise in the successful application of pre-engineering, engineered and special purpose pumps and system. WPIL group of pump company are Rutschi, FINDER, Aturia, Rotos, Marelli, Audoli & Bertola, Aris Chiappa, Sterling, APE/Mather & Platt South Africa. All WPIL pumps manufacturer has long history which over half century's experiences.



McFLO has served industries requiring solutions that add value and reduce cost throughout the life cycle of a pumping system. McFLO partners with customers to respond to the dynamic business conditions that affect them and to improve efficiency, maximize throughput and control process quality. Whether customer needs involve on-site technical assistance, equipment upgrades or broader project planning with full turnkey responsibility, McFLO delivers professional, reliable results.

## Pump Product Brands



Horizontal Axially Split Case  
Series: DHKS / LN / LR



- Operating Parameter
- Flows to 22,000 m<sup>3</sup>/hr
  - Heads to 250 m

Vertical Axially Split Case  
Series: DHKS / LNV



Double Stage  
Axially Split Case  
Series: U



- Operating Parameter
- Flows to 700m<sup>3</sup>/hr
  - Heads to 180 m

Double Stage  
Axially Split Case  
Series: D /



- Operating Parameter
- Flows to 1200m<sup>3</sup>/hr
  - Heads to 180 m

**End Suction Pump**  
Series: WPA



- Operating Parameter
- Q to 1200 m<sup>3</sup>/hr
  - H to 160 m

**End Suction Pump**  
Series: ACP



- Operating Parameter
- Q to 4000 m<sup>3</sup>/hr
  - H to 140 m

**Mixed-Flow Pump**  
Series: HW



- Operating Parameter
- Flows to 8000 m<sup>3</sup>/hr
  - Heads to 25 m

**Self Priming Pump**  
Series: SPD



- Operating Parameter
- Flows to 650 m<sup>3</sup>/hr
  - Heads to 38 m

**Domestic Pump**  
Series: HMS



- Operating Parameter
- Flows to 16 m<sup>3</sup>/hr
  - Heads to 65 m

**Domestic Pump**  
Series: HSI



- Operating Parameter
- Flows to 16 m<sup>3</sup>/hr
  - Heads to 65 m

**Domestic Pump**  
Series: HS



- Operating Parameter
- Flows to 16 m<sup>3</sup>/hr
  - Heads to 65 m

**Submersible Pump**  
Series: QXN



- Operating Parameter
- Flows to 80 m<sup>3</sup>/hr
  - Heads to 200 m

**Closed Couple**  
Series: KQW



- Operating Parameter
- Flows to 1400 m<sup>3</sup>/hr
  - Heads to 130 m

**Vertical In-line**  
Series: KQL



**Slurry Pump**  
Series: KZI



**Submersible Pump**  
Series: SH



**Submersible Agitator**  
Series: KBD / KBDZ



- Operating Parameter
- Flows to 80 m<sup>3</sup>/hr
  - Heads to 20 m

**Submersible Slurry**  
Series: KBS



- Operating Parameter
- Flows to 280 m<sup>3</sup>/hr
  - Heads to 20 m

**Submersible Slurry**  
Series: KBS



- Operating Parameter
- Flows to 28 m<sup>3</sup>/hr
  - Heads to 18 m

- Operating Parameter
- Flows to 350 m<sup>3</sup>/hr
  - Heads to 120 m

# Flood Control / Drainage / Irrigation / Raw Water Transfer Pump

**Submersible Hydraulic Motor Pump**  
Series: HSM



- Operating Parameter
- Flows to 16,000 m<sup>3</sup>/hr
  - Heads to 25 m

**Submersible Drainage Pump**  
Series: WQ / WQG / WQM



- Operating Parameter
- Flows to 11000 m<sup>3</sup>/hr
  - Heads to 45 m

**Submersible Hydraulic Motor Pump**  
Series: HSR



- Operating Parameter
- Flows to 8000 m<sup>3</sup>/hr
  - Heads to 25 m

## Submersible Axial Flow, Motor to 1500Hp



- Operating Parameter
- Flows to 16000m<sup>3</sup>/hr
  - Heads to 25 m

## Submersible Drainage / Sewerage Pump



Non Clog Impeller



Grinder Impeller

Channel Impeller



- Operating Parameter
- Flows to 6000m<sup>3</sup>/hr
  - Heads to 70 m

## Engineered Pump

Series: Vertical Turbine  
Submersible Deep Well




Operating Parameter

- Q to 12000 m<sup>3</sup>/hr
- H to 300 m

## Fire Pump

Series: Vertical Turbine  
Horizontal Split Case

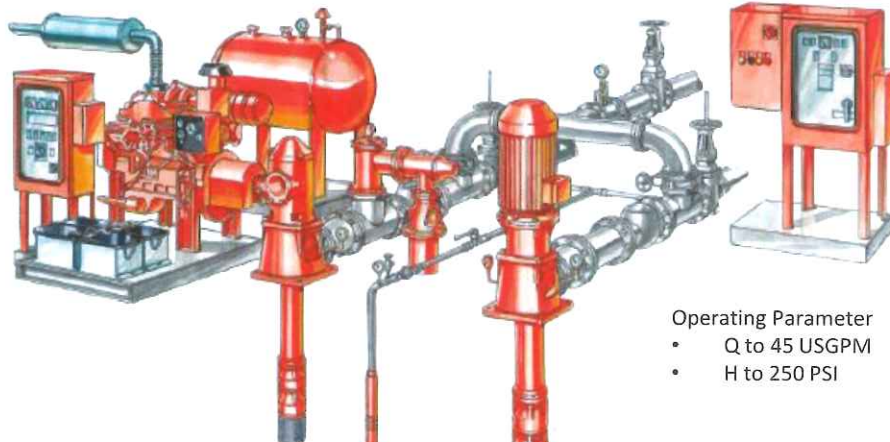

Operating Parameter

- Q to 45 USGPM
- H to 250 PSI

# Chemical Process / Magnetic Drive / 685 Seal-Less Pump

API 610 | API 676 | API 685

**Centrifugal Pump**  
Series: SDM



**VANE Pump**  
Series: SVM



**Turbine Pump**  
Series: PTM



**Seal-Less Pump**  
API 685



**Seal-Less Barrel**  
API 685



**Chemical Process**  
ISO 5199/2848



**Barrel Pump**  
API 610



**Axially Split Case**  
API 610



**Barrel Pump**  
API 610



**Double Suction**  
API 610

**Radial Split Case**  
API 610



**Vertical Turbine/ Sump Pump**  
API 610



**Twin Screw**  
API 676



# Multistage Pump



**Series: VMS**  
Q: 200 m3/hr  
H: 230 M



**Series: D-Line**  
Q: 700 m3/hr  
H: 800 M



**Series: KSY**  
Q: 1200 m3/hr  
H: 1000 M



**Deep Weel Pump**  
Q: 120 m3/hr  
H: 140 M

**Aturia Submersible**  
rewindable motor filled  
with water  
Max HP/V: 1000kW/11000V



## Jobs Reference Gallery



## Jobs Reference Gallery



**McFlo Technologies Sdn Bhd (486350-K)**

No.7, Jalan Industri USJ 1/7, Taman Perindustrian USJ 1,  
47600 Subang Jaya, Selangor Darul Ehsan, Malaysia.

Tel: +603 8023 8288 | Fax: +603 8023 7288

Email: [sales@mcflo.com.my](mailto:sales@mcflo.com.my) | Website: [www.mcflo.com.my](http://www.mcflo.com.my)